

23



 **ROBERTS[®]**
**FLOORING
& SPECIALTY
ADHESIVES**

ROBERTS® KEY MILESTONES

- 1938:** Company founded
- 1938:** Introduced Smoothedge Carpet Gripper
- 1939:** Introduced Rub-er-ege Latex Carpet Adhesive
- 1949:** Filed Carpet Stretching Device patent
(Today's kicker)
- 1959:** Filed trademark for Anchor-Weld
- 1963:** Incorporated
- 1968:** Filed Loop Pile Carpet Cutter patent
- 1968:** Filed Cushion Back Carpet Cutter patent
- 1968:** Filed patent for Carpet Trimmer
(Today's Wall Trimmer)
- 1975:** Filed Carpet Adhesive Seaming Iron patent
(Today's Deluxe Heat Bond Iron)
- 1981:** Hot-Melt Carpet Seaming Tape was introduced and marketed worldwide
- 1987:** Became one of the first to market with solvent-free adhesives
- 1988:** Filed Carpet Stretcher patent
(Today's Power-Lok® and Junior Power Stretcher)
- 1994:** Filed Heat Seaming Iron patent *(Today's Cool Shield Heat-Bond Seaming Iron)*
- 1997:** QEP Co., Inc. acquired Roberts Consolidated Industries, Inc.
- 1998:** Filed Jamb Saw patent
- 2001:** Filed Carpet Knife patent
(Today's Cut & Jam Knife)
- 2005:** Launched AirGuard® Premium Underlayment
- 2017:** Filed Flooring Spacer patent
(Today's Dual Expansion Flooring Spacer)
- 2019:** Launched Universal+ Adhesives with Advanced Moisture Technology
- 2021:** Filed 4-in-1 Flooring Expansion Spacer patent
- 2023:** Filed patents on nine new flooring tools



The quintessential American dream, ROBERTS® began with a shared vision - a vision for working smarter not harder - to more quickly and efficiently install wall-to-wall carpet. Pooling a modest sum of \$3,000 to invest in plywood, a table saw, shingle nails, pliers and a few other essentials, Roy Roberts, Hugh Livie and Ken Bishop travelled the countryside selling and training installers to use tackless carpet strips.

Decades later, with countless patents and hundreds of products available worldwide, ROBERTS continues to be recognized as the world's authority on flooring installation tools, earning the respect and trust of generations of carpet installers.

We take great pride in the quality and dependability of our ROBERTS products and are committed to the evolution of these offerings to meet the needs and challenges of today's professional installers.

A Brand You Can Trust.

An iconic brand with an established market in more than 100 countries, ROBERTS capitalizes on decades of experience in the industry, fosters True Partnerships with national trade affiliates, and is committed to exceeding your expectations - one product at a time.

- **Award-winning, multilingual Customer Service Team**
- **Expert-level technical support to receive and resolve your product and industry questions**
- **Research & Development Team dedicated to improving, advancing, enhancing, and innovating our products through best of class findings from across the globe**
- **Partnership with industry affiliates including the International Certified Flooring Installers Association, the National Wood Flooring Association, and the Wood Floor Covering Association among others, to support and invest in the trade**
- **1.5M ft² of warehouse and manufacturing space to ensure job-lot quantities and availability of replacement parts**

ROBERTS® On-Going Commitment to Sustainability

We routinely challenge ourselves to reimagine the design, packaging and construction of our products with materials that are recycled, biodegradable or otherwise earth friendly. Our most recent eco-friendly / sustainability efforts include the following:

- **Removed single use plastic from more than 200 items**
- **Replaced tens of thousands of lbs of virgin plastic with recycled plastic**
- **Eliminated 80,000+ lbs of plastic from our packaging**

Supporting Professional Installers
- Since 1938 -

THE ROBERTS CO.





TABLE OF CONTENTS



5

ADHESIVE OVERVIEW

MOISTURE CONTROL
GOLDGUARD®
CRI GREEN LABEL +PLUS®
LEED®
ENVIRO FRIENDLY



20

RESILIENT ADHESIVES

7399 UNIVERSAL+
7350 UNIVERSAL
6280 PRESSURE SENSITIVE
2057 VCT-EZ
2310 RESILIENT
2350 HARD-SET
2001 FELT-BACKED SHEET
7500 VINYL SEAM SEALER
7200 BASE BOND®



6

SPECIALTY ADHESIVES

5900 CERAMIC TILE
7250 CORK UNDERLAYMENT
8600 NOSE BOND®
8200 QUICKBOND



23



10

PUTTY

UNIVERSAL REPAIR KIT
WOOD, LAMINATE &
VINYL PUTTY



24

WOOD ADHESIVES

1550 MAX COMPLETE®
1407 ENGINEERED
1406 TONGUE & GROOVE



14

MERCHANDISING

COUNTERTOP DISPLAYS
& IN-AISLE DISPLAYS

MULTIPURPOSE ADHESIVES

3300 MULTIPURPOSE
3085 MULTIPURPOSE
3000 MULTIPURPOSE
3087 MULTIPURPOSE



17

CARPET ADHESIVES

3095 CARPET
6700 INDOOR/OUTDOOR
4002 CARPET PAD
8015 SEAM REPAIR
8502 SEAM REPAIR

TROWELS

CARPET, VINYL & WOOD
TROWELS AND SNOZZLE



27

PREMIUM ADHESIVE SOLUTIONS

ROBERTS® Moisture Control Adhesives

Our best-in-class resilient flooring adhesives are equipped with moisture control technology to withstand moisture vapor emission rates (MVER) up to 12 lbs., and relative humidity (RH) up to 99%. Our premium urethane wood adhesives provide unlimited moisture vapor protection and require no moisture testing.

SAVE TIME. SAVE STEPS. SAVE MONEY.



UP TO 12 LBS.



UP TO 8 LBS.



UP TO 10 LBS.

ROBERTS® takes environmental responsibilities seriously, strategically participating with governing agencies and organizations to establish the highest standards for sustainable ecologically conscientious products. We continue to minimize our global footprint as well as the environmental impact of our products by ongoing improvement to product technologies, as well as manufacturing, distribution and packaging methods.



Advanced Antimicrobial Technology

Our adhesives feature advanced antimicrobial protection. Many include GOLDGUARD® to inhibit the growth of mold, mildew and odor-causing bacteria.



CRI Green Label +Plus®

The Carpet and Rug Institute's Green Label +Plus® Logo indicates our adhesive has been tested and meets the most stringent criteria for low chemical emissions.



LEED® v4 Qualified Adhesives

LEED® certification is a globally recognized symbol of sustainability achievement. Many of our adhesives contribute one or more points in the LEED® rating systems. Learn more at www.usgbc.org/LEED.



ROBERTS Enviro Friendly

When you see our green "e" logo, you are choosing a product that is environmentally conscious, while supporting a company that is committed to protect and sustain our environment.

Purchase ROBERTS® Adhesives IN BULK and SAVE! See your sales rep for more details!



RESILIENT ADHESIVES



*7500 Vinyl Seam Sealer is LEED(R) qualified and Enviro Friendly only.

ROBERTS® Resilient Flooring Adhesives offer unparalleled levels of moisture control, superior bond strength and application versatility. These adhesives are designed for use with most flooring types including LVT / LVP, carpet tiles, sheet goods, and many types of underlayment.

ROBERTS resilient adhesives are certified for low emissions, equipped with mold and mildew protection, and may contribute to one or more points in the LEED® rating system.

7399 UNIVERSAL⁺

Featuring tremendous bond strength, unparalleled moisture protection and plasticizer migration resistance, ROBERTS® 7399 UNIVERSAL+ can be roller or trowel applied. VOC: < 1 g/L.

- Ideal for LVT, LVP, VCT, solid vinyl and fiberglass-backed sheet goods and other flooring types
- Maximum moisture resistance up to 12 lbs. MVER / 99% RH
- Rated for heavy rolling loads
- Rated for residential, commercial, and institutional traffic

PERMANENT (WET-SET METHOD)

Open Time: Up to 20 min. Working Time: Up to 40 min.

PRESSURE SENSITIVE (TACK-SET METHOD)

Open Time: Up to 60 min. Working Time: Up to 12 hours



AVAILABLE SIZES

Item No.	Unit Size	Pkg. Qty.
7399-4	4 Gallon	1
7399-1	1 Gallon	4



TROWELS

1/16" x 1/16" x 1/16"

1/16" x 1/32" x 1/32"

Medium Nap Roller



7350 UNIVERSAL

ROBERTS® 7350 UNIVERSAL is a maximum performance, pressure sensitive formula specifically designed for installing large format luxury vinyl tiles and planks, as well as most types of resilient floor coverings.

- Ideal for LVT, LVP, VCT, fiberglass-sheet goods and acoustical underlayment
- Superior moisture resistance up to 10 lbs. MVER / 90% RH with aggressive tack
- Re-bondable, pressure sensitive with aggressive tack
- Permanent or releasable application method
- Rated for residential and commercial traffic

PERMANENT (WET-SET METHOD)

Open Time: Up to 20 min. Working Time: Up to 40 min.

PRESSURE SENSITIVE (TACK-SET METHOD)

Open Time: Up to 45 min. Working Time: Up to 14 hours



AVAILABLE SIZES

Item No.	Unit Size	Pkg. Qty.
7350-4	4 Gallon	1
7350-1	1 Gallon	4
7350-0	1 Quart	6



TROWELS

1/16" x 1/16" x 1/16"

1/16" x 1/16" x 3/32"

1/16" x 1/32" x 1/32"

Medium Nap Roller



6280 PRESSURE SENSITIVE

An acrylic, pressure sensitive adhesive, ROBERTS® 6280 is highly versatile for use with many types of vinyl flooring and carpet tile, and may be used as a releasable / repositionable or permanent application method. VOC: < 1 g/L.

- Can also be used with solid vinyl, fiberglass-reinforced sheet vinyl and LVT (up to 12" x 12")
- Moisture resistance up to 8 lbs / 80% RH
- Rated for residential and moderate commercial traffic

PERMANENT (WET-SET METHOD)

Open Time: Up to 20 min. Working Time: Up to 60 min.

RELEASABLE (TACK-SET METHOD)

Open Time: Up to 60 min. Working Time: Up to 12 hours



AVAILABLE SIZES

Item No.	Unit Size	Pkg. Qty.
R6280-4	4 Gallon	1



TROWELS

1/8" x 1/8" x 1/16"

1/16" x 1/16" x 1/16"

Medium Nap Roller



2057 VCT-EZ

ROBERTS® 2057 VCT-EZ is a premium, thin spread adhesive designed for the installation of vinyl composition tile (VCT). VOC: < 1 g/L.

- Formulated specifically for use with vinyl composition tile (VCT) only
- High moisture resistance up to 8 lbs. MVER / 85% RH
- Good residual tack
- Extended working time
- Rated for residential and moderate commercial traffic

Open Time: Up to 60 min.
Working Time: Up to 12 hrs.




AVAILABLE SIZES

Item No.	Unit Size	Pkg. Qty.
2057-4	4 Gallon	1
2057-1	1 Gallon	4
2057-0	1 Quart	6



TROWELS



2310 RESILIENT

ROBERTS® 2310 RESILIENT Fiberglass-Backed Sheet Vinyl Adhesive is formulated with advanced tack and flexible working time. VOC: < 1 g/L.

- Ideal for fiberglass-backed sheet vinyl and LVT (up to 12" x 12")
- Permanent or releasable application methods
- Pressure sensitive; remains tacky
- Rated for residential and light commercial traffic

PERMANENT (WET-SET METHOD)
Open Time: Up to 25 min. Working Time: Up to 45 min.

RELEASABLE (TACK-SET METHOD)
Open Time: Up to 60 min. Working Time: Up to 6 hours



AVAILABLE SIZES

Item No.	Unit Size	Pkg. Qty.
2310-4	4 Gallon	1
2310-1	1 Gallon	4

TROWELS



2350 HARD-SET RESILIENT

Exceptional acrylic formula designed with up-front pressure sensitive performance, ROBERTS® 2350 HARD-SET Resilient Flooring Adhesives cures to a permanent bond. Excellent for use on installations requiring resistance to indentations from heavy point and rolling loads. VOC: < 1 g/L.

- High moisture resistance up to 8 lbs. MVER / 85% RH
- Resists indentations from heavy rolling loads
- Excellent initial grab and early bond strength
- Rated for heavy commercial traffic

Open Time: Up to 15 min.
Working Time: Up to 60 min.



AVAILABLE SIZES

Item No.	Unit Size	Pkg. Qty.
2350-4	4 Gallon	1



TROWELS



2001 FELT-BACKED SHEET VINYL

ROBERTS® 2001 is a superior, commercial-grade adhesive developed with the optimum open time and working time for positioning felt-backed sheet vinyl flooring. VOC: < 1 g/L.

- Formulated specifically for use with felt-backed sheet vinyl only
- Moisture resistance up to 5 lbs / 80% RH
- Lifetime non-staining warranty
- Rated for residential and moderate commercial traffic

Open Time: Up to 25 min.
Working Time: Up to 45 min.



TROWELS

1/16" x 1/32" x 1/32"

1/16" x 1/16" x 1/16"



AVAILABLE SIZES

Item No.	Unit Size	Pkg. Qty.
2001-4	4 Gallon	1
2001-1	1 Gallon	4

7500 VINYL SEAM SEALER

ROBERTS® 7500 Vinyl Seam Sealer creates a strong, durable bond to easily seal seams in many types of vinyl sheet flooring.

- Ideal for fiberglass-back, felt-back, heterogeneous and linoleum sheets goods
- Develops a durable bond, can be walked on within 2 hours
- Provides a clean, continuous seam, reducing dirt collection
- Simple one-part application with easy clean up
- 1/8" bead for approximately 144 lineal feet per 8 oz bottle

Coverage: Up to 144 lineal feet per 8 ounces
Working Time: Up to 15 min.



AVAILABLE SIZES

Item No.	Unit Size	Pkg. Qty.
7500-8	8 Ounces	6



7200 BASE BOND®

A superior-grade, solvent-free adhesive specifically designed for the interior installation of vinyl, rubber and carpet wall base, ROBERTS® Base Bond® offers fast set up and non-staining features. VOC: < 1 g/L.

- Ideal for use over porous wall surfaces such as gypsum drywall, brick, concrete block, wood, properly cured plaster, and concrete
- Excellent holding power with great wet suction
- Strong initial grab for holding wall base
- Outstanding plasticizer migration resistance

Open Time: Up to 10 min.
Working Time: Up to 30 min.



TROWELS

1/8" x 1/8" x 1/8"

3/16" x 5/32" V

Snozzle Applicator



AVAILABLE SIZES

Item No.	Unit Size	Pkg. Qty.
7200-4	4 Gallon	1
7200-1	1 Gallon	4
7200-30C	30 Ounces	12
7200-11C	11 Ounces	12



WOOD ADHESIVES

ROBERTS® Wood Flooring Adhesives are designed to perform over most substrates.

These versatile formulations bond with engineered wood, wide board, solid wood, and bamboo flooring. Our advanced performance urethane wood adhesive provides a moisture barrier, sound reduction and crack suppression.

These elastomeric and fast curing adhesives are low VOC and LEED® compliant.

1550 MAX COMPLETE®

A single component, moisture-cured urethane adhesive, ROBERTS® 1550 MAX COMPLETE® is formulated for full-surface bonding of engineered, solid wood and bamboo flooring.

- 3-in-1, moisture-cured low odor urethane adhesive
- Bridges non-structural cracks in concrete up to 1/8"
- Creates a sound-reduction layer
- Unlimited sub-floor moisture vapor protection
- No moisture testing required, only dry to touch substrate needed
- Rated for residential and light commercial traffic

Open Time: Up to 60 min.
Working Time: Up to 60 min.

⚠️ WARNING: Cancer, Birth Defects and Reproductive Harm - www.P65Warnings.ca.gov. See Pg. 31, *Prop 65 - 6


Sound Ratings
STC 62 (ASTM E-90)
FIC 52 (ASTM 989)

AVAILABLE SIZES

Item No.	Unit Size	Pkg. Qty.
1550-4	4 Gallon	1



TROWELS



1407 ENGINEERED

ROBERTS® ENGINEERED 1407 is an advanced acrylic adhesive, specifically designed for the installation of engineered and parquet wood flooring.

- Ideal with engineered wood planks up to 1/2 in. thick and 5 in. wide, plain back parquet and cork underlayment
- Easy to trowel, great green grab and strong durable bond
- Rated for residential and light moderate commercial


Open Time: Up to 20 min.
Working Time: Up to 30 min.

AVAILABLE SIZES

Item No.	Unit Size	Pkg. Qty.
1407-4	4 Gallon	1
1407-1	1 Gallon	4
1407-30C	30 Ounces	12



TROWELS



1406 TONGUE & GROOVE

ROBERTS® 1406 TONGUE & GROOVE Flooring Adhesive is specifically formulated for floating applications of laminate and wood flooring that require a tongue and groove adhesive. VOC: < 1 g/L.

- May be used over radiant heat systems
- Fast drying
- Exceptional bond strength
- Features a specialized applicator tip for precise placement
- Meets the specifications of ANSI/HPVA Type II / D3

Coverage: Up to 400 lineal feet per pint
Assembly Time: Within 5 min. Drying Time: 12-24 hrs.

AVAILABLE SIZES

Item No.	Unit Size	Pkg. Qty.
1406-P	1 Pint	12



DISCOVER SUPERIOR SOUND PROOFING



WITH THESE UNDERLAYMENTS



FOR VINYL, LAMINATE & WOOD SOUND BARRICADE



70-197
(200 SQ. FT ROLL) 36" X 66'

- PROPRIETARY BLEND STOPS THE GROWTH OF MOLD AND MILDEW
- RUBBER FOAM TECHNOLOGY PROVIDES SUPERIOR ACOUSTICAL AND CUSHION-LIKE PROPERTIES
- IDEAL FOR FLOATING, NAIL DOWN, STAPLE OR DOUBLE-GLUE DOWN INSTALLATIONS
- SOUND RATINGS: (LVT & LVP) IIC=69, STC=63, DELTA=25; (LAMINATE & WOOD) IIC=68, STC=63, DELTA=22



FOR CERAMIC TILE, STONE, MARBLE AND MORE!

NATURAL CORK



72000Q, 72005Q,
70-175

- NATURALLY MOLD AND MILDEW RESISTANT
- PROVIDES ACOUSTICAL SOUND CONTROL AND CUSHIONING FOR SOFTER, QUIETER FOOTFALLS
- RESISTS THE TRANSFER OF STRESS CRACKS FROM SUBFLOOR THROUGH TO FLOORING SURFACE
- SOUND RATINGS WITH 6" CEMENT SLAB AND SUSPENDED CEILING: (72000Q / 72005Q / 70-175 6 MM) IIC=61, STC=60;

INSTALLATION SUCCESS IS IN YOUR HANDS



THE MOST ADVANCED POWER STRETCHER AVAILABLE

POWER-LOK® CARPET STRETCHER

10-254V



- SWIVEL HEAD LOCKS INTO 17 DIFFERENT STRETCH / PATTERN-HOLDING POSITIONS
- ADJUSTABLE PIN PENETRATION FOR DIFFERENT CARPET THICKNESSES
- NON-MARRING TAIL BLOCK PREVENTS DAMAGE TO FINISHED WALLS



FOR ALL OF YOUR UNDERCUTTING NEEDS

LONGNECK PLUS 6" JAMB SAW

10-56



- 1100-WATT, 120V—60HZ, 9.6 AMPS MOTOR
- CUTS FULL INSIDE CORNERS IN MOLDING UP TO 1/2" THICK
- PRECISION HEIGHT ADJUSTMENT FROM FLUSH TO 1-1/16"



LEVERAGE THE POWER & VERSATILITY

13" MULTI-FLOOR CUTTER

10-94



- QUICKLY CUTS CARPET TILE, LAMINATE, ENGINEERED WOOD FLOORING, VINYL PLANK FLOORING, AND MORE
- EXTENDED HANDLE PROVIDES MORE CUTTING POWER WITH LESS EFFORT



PERFECT FOR FLATTENING ADHESIVE BUILD UP

HEAVY DUTY FLOORING ROLLER

10-950 - 10-952



- SEGMENTED, CHROME-PLATED ROLLERS ENSURE EVEN PRESSURE INTO FLOORING
- DESIGNED WITH INSET AXLES TO PREVENT WALL SCUFFING



MULTIPURPOSE ADHESIVES



ROBERTS® Multipurpose Adhesives are designed with the installer in mind. These formulations offer easy application, extended open time, and are compatible with most residential and commercial carpets. All our multipurpose adhesives are CRI Green Label +Plus™ Certified, LEED® compliant, environmentally friendly, and include the GoldGuard® antimicrobial system to protect against mold and mildew growth.

3300 MULTIPURPOSE

ROBERTS® 3300 is a superior performing, high-solids adhesive, formulated for installing hard-to-bond commercial carpet plus most types of felt-backed, fiber-backed and paper-backed resilient floor coverings. VOC < 1g/L.

- High moisture resistance up to 8 lbs. MVER / 85% RH
- Aggressive grab for reduced bubbling and curling
- Excellent re-bond properties
- Ideal for direct and double-bond installations
- Rated for heavy commercial traffic
- NFPA Class A / UBC Class 1 Fire Ratings

Open Time: Up to 30 min.
Working Time: Up to 60 min.




AVAILABLE SIZES

Item No.	Unit Size	Pkg. Qty.
3300-4	4 Gallon	1



TROWELS



3085 MULTIPURPOSE

ROBERTS® 3085 is a high performance commercial-grade adhesive developed for the direct glue installation of most commercial carpets. It offers great adjustability time and once dry, a very strong bond to hold pattern carpets in place. VOC: < 1 g/L.

- Ideal for carpet, felt-backed sheet vinyl and cork underlayment
- Great adjustability time with a strong bond when cured
- Excellent for pattern carpets
- Rated for heavy residential / moderate commercial traffic
- NFPA Class A / UBC Class 1 Fire Ratings


Open Time: Up to 40 min.
Working Time: Up to 70 min.

AVAILABLE SIZES

Item No.	Unit Size	Pkg. Qty.
3085-4	4 Gallon	1
3085-1	1 Gallon	4
3085-0	1 Quart	6



TROWELS



3000 MULTIPURPOSE

ROBERTS® 3000 is a contract-grade adhesive, formulated with a longer open time for optimal positioning, ideal for the installation of most types of commercial carpet and felt-backed sheet vinyl. VOC: < 1 g/L.

- Ideal for carpet and felt-backed sheet vinyl
- Longer open time for optimal positioning
- Develops tack for the installation of rigid-backed carpets
- Rated for moderate residential / light commercial traffic
- FPA Class A / UBC Class 1 Fire Ratings


Open Time: Up to 60 min.
Working Time: Up to 90 min.

AVAILABLE SIZES

Item No.	Unit Size	Pkg. Qty.
3000-4	4 Gallon	1
3000-1	1 Gallon	4



TROWELS



3087 MULTIPURPOSE

Developed for the direct and double-glue down installations of most carpet, ROBERTS® 3087 Multipurpose is a high performance, high-solids and commercial-grade adhesive.

- Excellent shear and bond strength
- Fast green grab for immediate light traffic
- Ideal for direct and double-bond installations
- Rated for heavy residential and moderate commercial traffic
- NFPA Class A / UBC Class 1 Fire Ratings

Open Time: Up to 45 min.

Working Time: Up to 70 min.

AVAILABLE SIZES

Item No.	Unit Size	Pkg. Qty.
3087-4	4 Gallon	1



TROWELS





CARPET ADHESIVES



ROBERTS® Carpet Adhesives are industry staples, developed for high performance and formulated for direct and double glue-down applications. These adhesives are intended for commercial installations, and offer optimum resistance to moisture and pH. These trusted formulas are certified for low emissions, environmentally friendly, and include the GoldGuard® antimicrobial system to protect against mold and mildew growth.

3095 CARPET

Commercial-grade adhesive developed for the most demanding carpet installations, ROBERTS® 3095 is an excellent adhesive for direct or double-bond installation methods. VOC: < 1 g/L.

- Developed for the most demanding carpet installations, including broadloom
- Superior moisture resistance up to 10 lbs. MVER / 90% RH
- High tack and fast grab
- Direct and double-bond installations
- Rated for heavy commercial traffic

Open Time: Up to 20 min.
Working Time: Up to 40 min.



AVAILABLE SIZES

Item No.	Unit Size	Pkg. Qty.
3095-4	4 Gallon	1
3095-1	1 Gallon	4



TROWELS



6700 INDOOR/OUTDOOR

ROBERTS® 6700 is a solvent-free adhesive designed for the exterior or interior installation of indoor/outdoor carpet, and is ideal for enclosed patios or sunrooms as well as basements. VOC: < 1 g/L.

- Compatible with most indoor/outdoor carpets with polypropylene, rubber-backed (foam, marine, waffle), urethane and tufted, woven or non-woven/needle-bond backings
- Solvent-free, non-flammable and low VOC
- Excellent moisture resistance when cured

Open Time: Up to 30 min.
Working Time: Up to 60 min.

AVAILABLE SIZES

Item No.	Unit Size	Pkg. Qty.
6700-4	4 Gallon	1
6700-1	1 Gallon	4
6700-0	1 Quart	6



TROWELS



4002 LATEX CARPET PAD

ROBERTS® 4002 is a solvent-free, latex-based, environmentally friendly carpet pad adhesive, developed to quickly bond carpet pads to subfloors in stretch-in carpet installations. VOC: < 1 g/L.

- Prevents pad movement for trouble-free installations
- Permanent bond to porous and non-porous substrates
- Fast grabbing and quick drying

Coverage: Up to 700 lineal feet per gallon, depending on application method

Open Time: Up to 15 min.
Working Time: Up to 45 min.

AVAILABLE SIZES

Item No.	Unit Size	Pkg. Qty.
4002-1	1 Gallon	4



8015 UNIVERSAL CARPET SEAM

ROBERTS® 8015 is a solvent-free universal carpet sealer developed for seaming most types of carpets and preventing edge unraveling. May also be used to repair bubbles in existing installations. VOC: < 1 g/L.

- Fast drying, solvent-free formula
- Can be used on both direct- and double-bond applications as a seam adhesive
- Helps prevent carpet unraveling and delaminating

Coverage: Up to 660 lineal feet per quart,
depending on application method

Open Time: Up to 10 min.

AVAILABLE SIZES

Item No.	Unit Size	Pkg. Qty.
8015-0	1 Quart	6
8015-A	8 Ounces	12



8502 LATEX CARPET SEAM

ROBERTS® 8502 is recommended for seam sealing carpets, sealing raw edges, binding, strengthening worn backings and applying new backings on area rugs. VOC: < 1 g/L.

- Seals and binds carpet edges to prevent unraveling
- Provides enhanced slip resistance
- Use to apply new backings to area rugs

Coverage: Up to 725 lineal feet per quart,
depending on application method

AVAILABLE SIZES

Item No.	Unit Size	Pkg. Qty.
8502-0	1 Quart	12





SPECIALTY ADHESIVES

ROBERTS® Specialty Adhesives are formulated for unique tasks, and to complete some of the most demanding installation projects. From ceramic tile adhesive to stair nose and web spray construction adhesives, these specialty products are manufactured with the installer in mind.

5900 CERAMIC TILE

High-performance and ready-to-use, ROBERTS® 5900 Ceramic Tile Adhesive is a Type I Mastic used for installing ceramic, porcelain, natural stone, quarry and mosaic tile on floors and walls. VOC: <1 g/L


- Bonds with a variety of flooring rated substrates
- May be used for countertop, backsplash and shower wall installations
- Spreads effortlessly, sets quickly
- Easy clean-up
- Premixed and ready-to-use
- Rated for residential and light commercial traffic

Open Time: Up to 35 min.
Working Time: Up to 35 min.

⚠️ WARNING: Cancer, Birth Defects and Reproductive Harm - www.P65Warnings.ca.gov. See Pg. 31, *Prop 65 - 6



TROWELS



AVAILABLE SIZES

Item No.	Unit Size	Pkg. Qty.
5900-3	3.5 Gallon	1
5900-1	1 Gallon	4

7250 CORK UNDERLAYMENT


ROBERTS® 7250 is recommended for the installation of acoustical cork underlayment rolls or sheets. VOC: < 1 g/L.

- Dries quickly for a reliable, strong bond
- Resists mold and mildew with GoldGuard® protection
- Extended working time for optimal placement/positioning
- Non-flammable. NFPA Class A and UBC Class 1 Fire Ratings

Open Time: Up to 60 min.
Working Time: Up to 90 min.



TROWELS



AVAILABLE SIZES

Item No.	Unit Size	Pkg. Qty.
7250-4	4 Gallon	1
7250-1	1 Gallon	4

8600 NOSE BOND®

Low VOC advanced acrylic adhesive, ROBERTS® 8600 Nose Bond® is specifically designed for interior stair nose installation on properly prepared wood subfloors.

- Ideal for wood, laminate and rigid PVC stair nose
- Can also be used for wood moldings, wood trim installs and repairs
- Water resistant, low odor, and easy to clean up
- Rated for residential and light commercial traffic

Open Time: Up to 20 min.
Working Time: Up to 30 min.



AVAILABLE SIZES

Item No.	Unit Size	Pkg. Qty.
8600-11C	11 ounces	12



8200 QUICK BOND SPRAY

ROBERTS® 8200 is a fast-tacking aerosol construction adhesive with the versatility to be used on a wide array of substrates. ROBERTS 8200 is formulated to bond to paper, cardboard, fabric, leather, foil, fiberglass to metal, drywall, masonry, wood and a variety of other substrates.

- Fast-tack, fast-grab web spray
- Low soak-in with high bond strength
- Permanent or repositionable bond
- Does not contain chlorofluorocarbons (CFC's), ozone depleting chemicals, or methylene chloride

Coverage: Up to 100 ft² per 12 ounce can

 **Extremely Flammable**
Not for sale in California

 **WARNING: Cancer, Birth Defects and Reproductive Harm -**
www.P65Warnings.ca.gov. See Pg. 31, *Prop 65 - 6

AVAILABLE SIZES

Item No.	Unit Size	Pkg. Qty.
8200-12	12 Ounces	12



PUTTY

Repair minor damage to wood and vinyl floors, countertops or furniture with premixed on-trend color matching putties. Easy to use and quick drying, you'll restore the look and beauty in no time.

UNIVERSAL REPAIR KIT

The Universal Repair Kit is designed to repair cracks, scratches or other damage to wood floors, vinyl floors and counters, wood cabinets, molding and furniture.

- Features five on-trend colors and an empty container for custom mixing to match any project
- Easy to sand and stain
- Quick drying and no shrinking



Item No.	Description	Case Qty.	Packaging
10-33	Universal Repair Kit	6	Clamshell

WOOD, LAMINATE & VINYL PUTTY

Acrylic based and easy to use, the putty is used to fill gaps, nicks and scratches on wood, laminate and vinyl flooring.

- Use during floor installation to fill nail and screw holes or to repair damage on existing floors
- Features six on-trend colors to match a wide variety of flooring
- Easy to paint and sand
- Quick drying and no shrinking



AVAILABLE COLORS/SIZES

Item No.	Color	Case Qty.	Packaging
PC7725	Brown	6	3 oz Tube
PC7726	Light	6	3 oz Tube
PC7728	Gray	6	3 oz Tube
PC7730	Tan	6	3 oz Tube
PC7732	Dark Brown	6	3 oz Tube
PC7733	Light Gray	6	3 oz Tube





MERCHAN DISING

Increase profitability and generate more sales with numerous merchandising options. Tabletop / retail counter displays and in aisle / end cap displays allow you to feature adhesive cartridges and wood putty repair SKUS. Rugged, 4' gondola showcases top-selling tool assortment or can be customized to suit your merchandising needs.



WOOD PUTTY COUNTERTOP DISPLAY

FREE display (\$35 value) with the purchase of top selling tools.

- Included header measures 8½ wide x 3½ tall
- Display measures 8½ wide x 10 1/32" deep and 20 1/8" high

WOOD PUTTY IN-AISLE DISPLAY

FREE display (\$40 value) with the purchase of top selling tools.

- Included header measures 8½ wide x 3½ tall
- Display measures 8½ wide x 10 1/32" deep and 20 1/8" high



10-OZ ADHESIVE COUNTERTOP DISPLAY

FREE display (\$37.07 value) with the purchase of top selling tools.

- Included header measures 11.596" wide x 3-1/8" tall
- Display measures 11.596" wide 16.75" deep and 8.858" high

See your sales rep for more details!

10 OZ CARTRIDGE IN-AISLE DISPLAY

FREE display (\$46.75 value) with the purchase of top selling tools.

- Included header measures 5" wide x 3½" tall
- Display measures 5" wide x 5" deep and 41" high



30-OZ CARTRIDGE COUNTERTOP DISPLAY

FREE display (\$45.40 value) with the purchase of top selling tools.

- Included header measures 5.88" wide x 3-1/8" tall
- Display measures 5.88" wide 16.75" deep and 8.858" high


30 OZ CARTRIDGE IN-AISLE DISPLAY

FREE display (\$40 value) with the purchase of top selling tools.

- Included header measures 8½" wide x 3½" tall
- Display measures 8½" wide x 10 1/32" deep and 20 1/8" high



See your sales rep for more details!

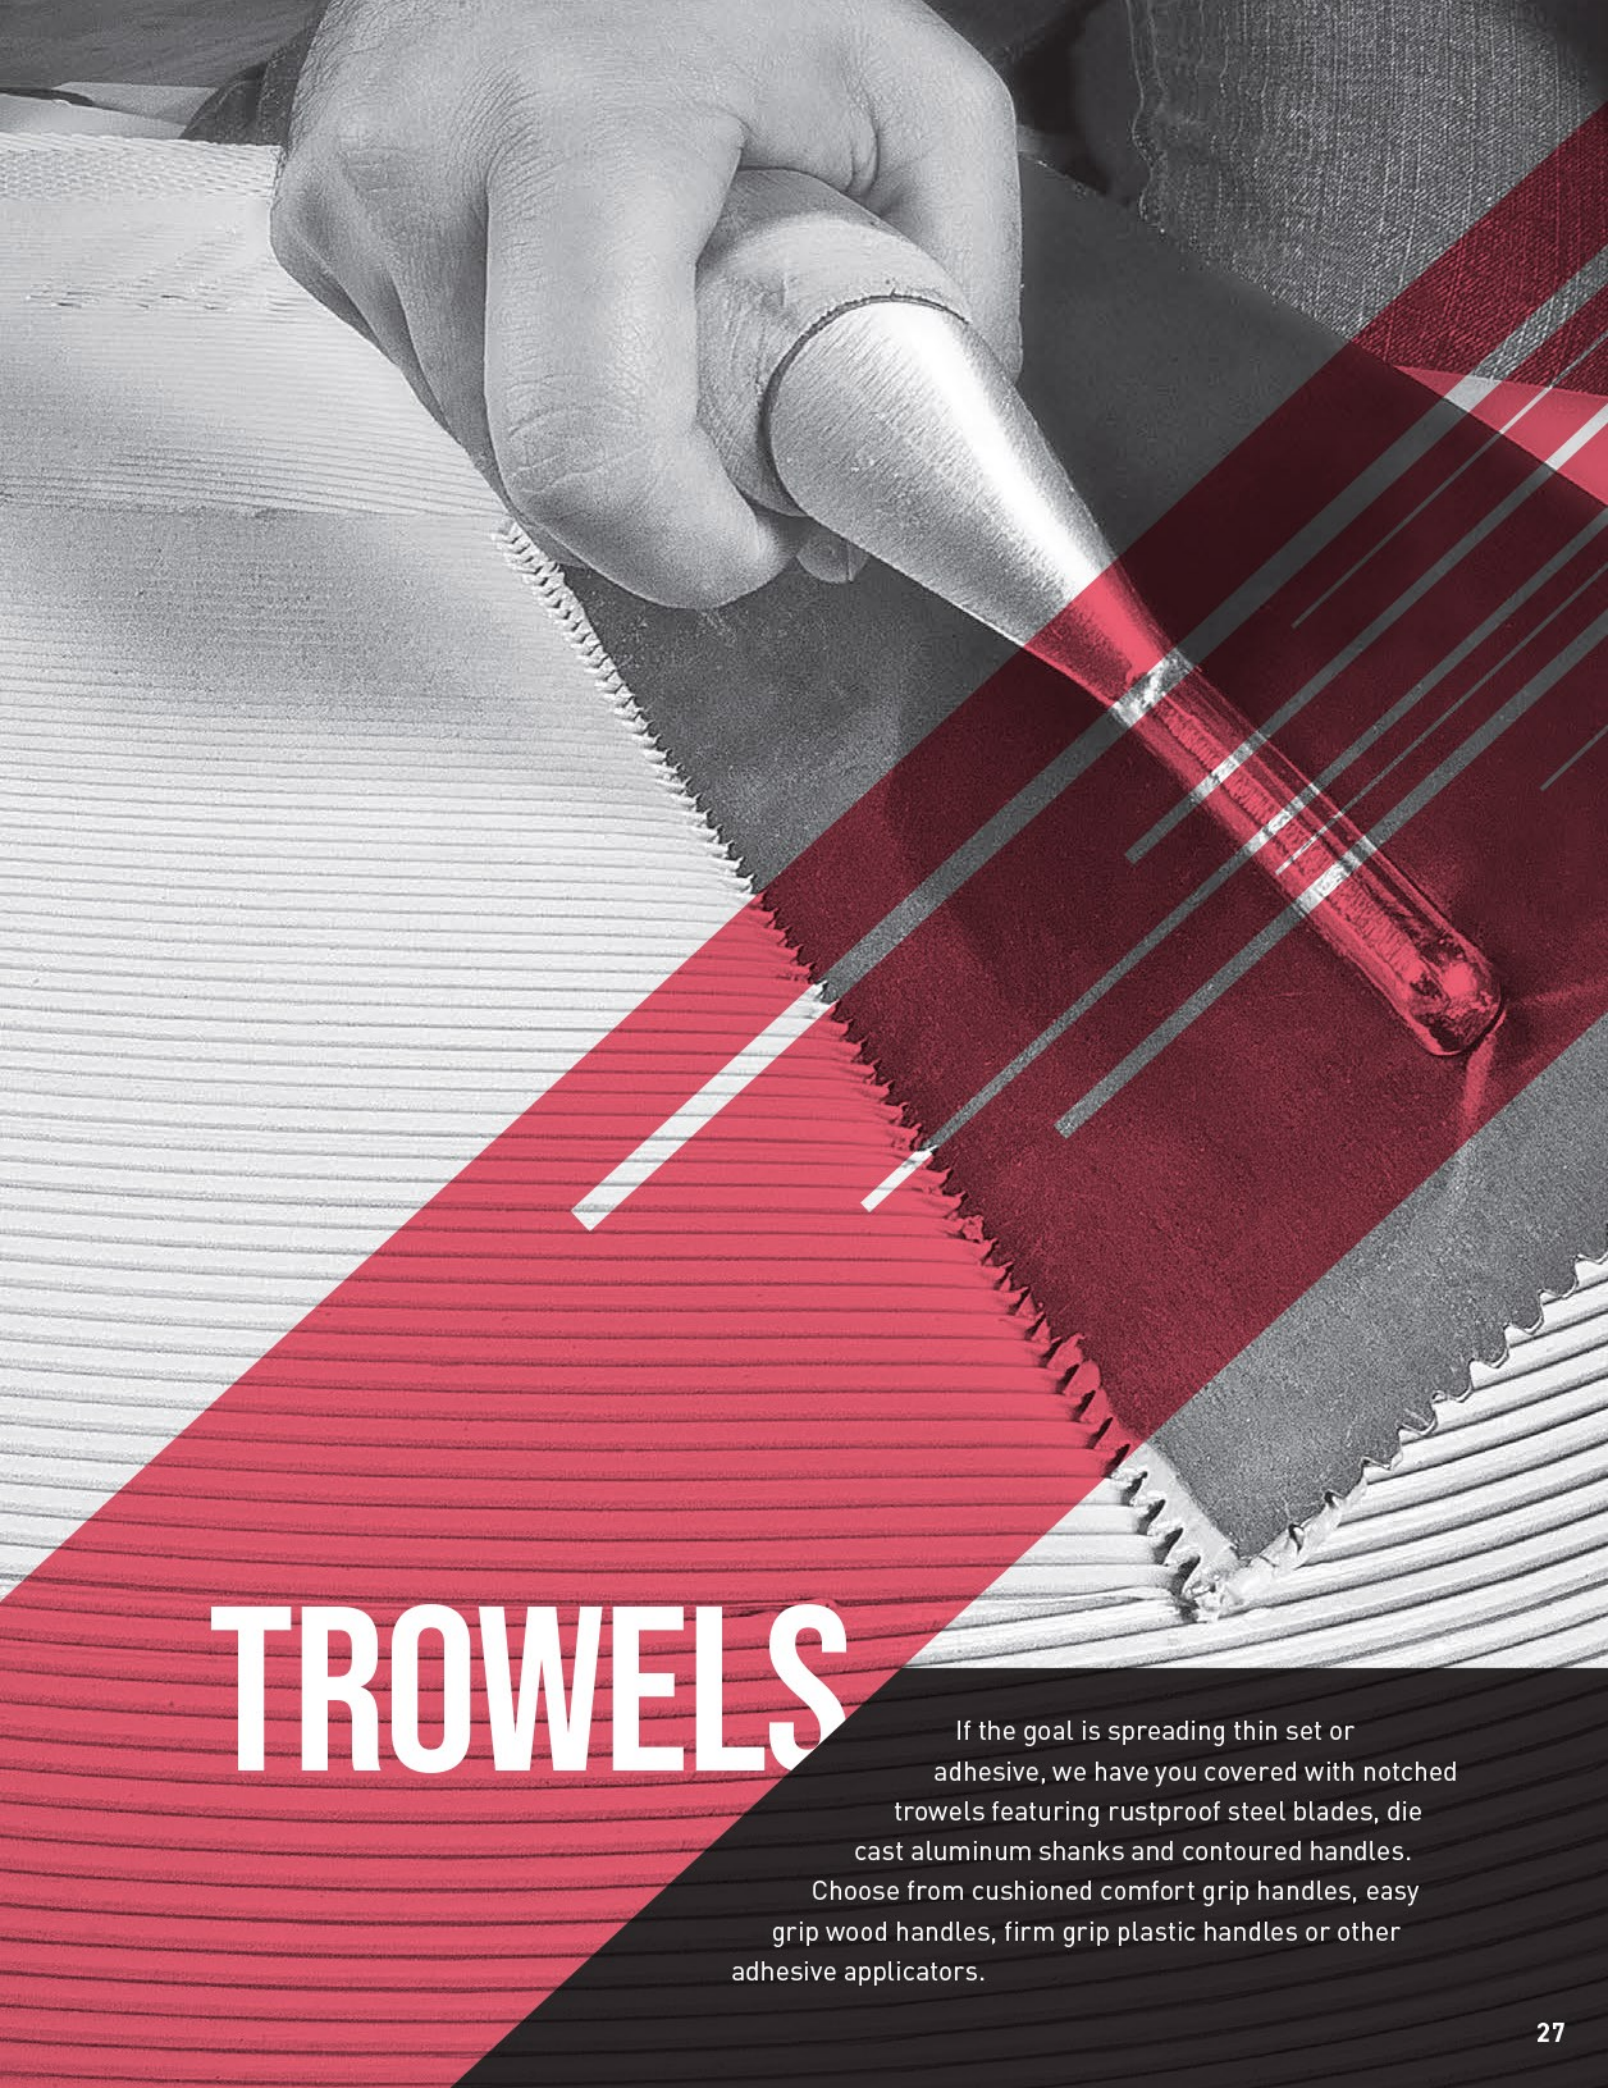

TROWELS

If the goal is spreading thin set or adhesive, we have you covered with notched trowels featuring rustproof steel blades, die cast aluminum shanks and contoured handles.

Choose from cushioned comfort grip handles, easy grip wood handles, firm grip plastic handles or other adhesive applicators.

COMFORT GRIP

High-quality 11" x 4½" trowel with rustproof stainless-steel blade and large, contoured, and cushioned grip handles for comfort.

- Durable 230 mm zinc die-cast shank with nine rivets
- Extra handle-to-shank clearance to allow for complete hand rotation
- First and last rivet reinforced and welded for added durability



WOOD HANDLE

High-quality 11" x 4½" trowel with hardened and tempered steel blade and large wooden handle for an easy grip.

- Blade is grounded and polished for long-lasting durability
- Long, die-cast aluminum shank
- First and last rivet reinforced and welded for added durability



ECONOMY

Engineered for extended wear and tear, Economy Notched Trowels are designed for application of pressure sensitive, resilient adhesives.

- Hardened, tempered steel blade for superior durability
- High-impact, black plastic handle for firm, comfortable grip



made in
USA

COVE BASE ADHESIVE SPREADER












Manufactured with a cold-rolled steel blade for durability, the Cove Base Adhesive Spreader is designed to spread adhesive for a flat, well-bonded cove base installation.

- Fits into a 1 qt. canister of adhesive for quicker, easier application
- Wood handle for comfort
- Features 3/16" x 5/32" V-Notch



Item No.	Description	Case Qty	Packaging
10033	Cove Base Adhesive Spreader	26	Label & Display Box

FOR CARPET, VINYL SHEET, LVT, VCT & WOOD


Notch Size	Application	Comfort Grip (11" Blade)	Wood Handle (11" Blade)	Economy
1/16" x 1/16" x 1/16" SQ 	For carpet tile, fiberglass sheet, felt-backed sheet, luxury vinyl tile, plank, and cork underlayment		49768	10-181*
1/16" x 1/16" x 1/16" SQ 	For carpet tile, fiberglass sheet, felt-backed sheet, luxury vinyl tile and plank	10-823 (with 10° blade angle)	10-810 (with 10° blade angle)	
1/8" x 1/8" x 1/8" SQ 	For pre-finished parquet and wall base		49766	
3/32" x 3/32" x 3/32" Flat-Top V 	For smooth backed carpet	10-833 (with 10° blade angle)	10-820 (with 10° blade angle)	
1/8" x 1/8" x 1/16" Flat-Top V 	For secondary-backed carpet, direct glue-down, sheet vinyl installations, and cork underlayment		49737	10137-12
1/16" x 1/32" x 1/32" U 	For VCT, vinyl, luxury vinyl tile and plank	10-829 (with 10° blade angle)	10-816 (with 10° blade angle) 49771	10-181*
1/16" x 1/32" x 5/64" U 	For carpet tile, fiberglass sheet, felt-backed sheet, and VCT		49738	
1/4" x 1/4" x 1/4" SQ 	For thinset application of ceramic tile 8" x 8" or smaller, laminated wood plank flooring, flat milled solid & shorts or plywood	49915 (QEP)	49713 (QEP)	10113Q (QEP)
1/4" x 1/4" x 1/4" Flat-Top V 	For pre-finished engineered wood plank, solid wood, bamboo and acrylic impregnated plank flooring		49769	
1/4" x 3/16" Tiger Tooth® 	For bamboo, solid and engineered wood flooring up to 1/2 in. thick		49767	
3/16" x 1/4" x 1/2" Flat-Top V 	For laminated wood plank, solid wood, bamboo and acrylic impregnated plank flooring		49730	

* Double Sided Trowels

Always check adhesive/mortar manufacturer's trowel recommendations before selecting a trowel notch.

All trowels measure: width x depth x space apart

Recommended notch sizes by NTCA (National Tile Contractors Association)

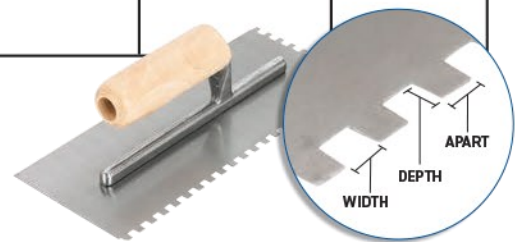

SNOZZLE ADHESIVE APPLICATOR

The SNOZZLE Adhesive Applicator creates a flat, well-bonded installation by spreading 11 rows of adhesive at a time.

- Compatible with 11 oz. and 30 oz. adhesive cartridges and fits most standard applicator guns
- Distributes adhesive in tight spaces where a standard trowel can't be used

Item No.	Description	Case Qty	Packaging
10-981-25	Snuzzle Adhesive Applicator	25	Hang Tag & Display Box
10-981	Canada Only: Snuzzle Adhesive Applicator (English/French Packaging)	25	Pegged Hang Tag



INDEX By Item Number

ITEM#	DESCRIPTION	PAGE	ITEM#	DESCRIPTION	PAGE
10-33	UNIVERSAL REPAIR KIT	23	6280	PRESSURE SENSITIVE ADHESIVE	7
10-56	LONGNECK PLUS 6" JAMB SAW	13	6700	INDOOR / OUTDOOR CARPET ADHESIVE	18
10-94	13" MULTI-FLOOR CUTTER	13	7200	BASE BOND® WALL BASE ADHESIVE	9
70-175	NATURAL CORK SHEETS (50-PK)	12	7250	CORK UNDERLAYMENT ADHESIVE	21
10-181	DUAL NOTCH ECONOMY TROWEL	29	7350	UNIVERSAL RESILIENT FLOORING & VINYL BACKED CARPET ADHESIVE	7
10-254V	POWER-LOK® CARPET STRETCHER VALUE KIT	13	7399	UNIVERSAL+ RESILIENT FLOORING & MODULAR CARPET TILE ADHESIVE	7
10-810	1/16" X 1/16" X 1/16" SQ-NOTCH WOOD HANDLE TROWEL	29	7500	VINYL SEAM SEALER	9
10-816	1/16" X 1/32" X 1/32" U-NOTCH WOOD HANDLE TROWEL	29	8015	UNIVERSAL CARPET SEAM SEALER	19
10-820	3/32" X 3/32" X 1/16" FLAT-TOP V-NOTCH TROWEL	29	8200	QUICK BOND™ SPRAY ADHESIVE	22
10-823	1/16" X 1/16" X 1/16" SQ-NOTCH COMFORT GRIP TROWEL	29	8502	LATEX CARPET SEAM SEALER	19
10-829	1/16" X 1/32" X 1/32" U-NOTCH COMFORT GRIP TROWEL	29	8600	NOSE BOND® STAIR NOSE ADHESIVE	21
10-833	3/32" X 3/32" X 1/16" FLAT-TOP V-NOTCH COMFORT GRIP TROWEL	29	10113Q	1/4" X 1/4" X 1/4" SQ-NOTCH ECONOMY TROWEL	29
10-950	75 LB HEAVY-DUTY FLOORING ROLLER	13	10137-12	1/8" X 1/8" X 1/16" FLAT-TOP V-NOTCH ECONOMY TROWEL	29
10-952	100 LB HEAVY-DUTY FLOORING ROLLER	13	49713	1/4" X 1/4" X 1/4" SQ-NOTCH WOOD HANDLE TROWEL	29
10-981	SNOZZLE ADHESIVE APPLICATOR (CANADA ONLY)	29	49730	3/16" X 1/4" X 1/2" FLAT-TOP V-NOTCH WOOD HANDLE TROWEL	29
10-981-25	SNOZZLE ADHESIVE APPLICATOR	29	49737	1/8" x 1/8" x 1/16" FLAT-TOP V-NOTCH WOOD HANDLE TROWEL	29
70-175	NATURAL CORK SHEETS (50-pk)	12	49738	1/16" X 1/32" X 5/64" U-NOTCH WOOD HANDLE TROWEL	29
70-197	SOUND BARRICADE UNDERLAYMENT	12	49766	1/8" X 1/8" X 1/8" SQ-NOTCH WOOD HANDLE TROWEL	29
1406-P	TONGUE & GROOVE FLOORING ADHESIVE	11	49767	1/4" X 3/16" TIGER TOOTH NOTCH WOOD HANDLE TROWEL	29
1407	ENGINEERED ADVANCED ACRYLIC ADHESIVE	11	49768	1/16" X 1/16" X 1/16" SQ-NOTCH WOOD HANDLE TROWEL	29
1550	MAX COMPLETE® WOOD FLOORING ADHESIVE	11	49769	1/4" X 1/4" X 1/4" FLAT-TOP V-NOTCH WOOD HANDLE TROWEL	29
2001	FELT-BACKED SHEET VINYL ADHESIVE	9	49771	1/16" X 1/32" X 1/32" U-NOTCH WOOD HANDLE TROWEL	29
2057	VCT-EZ VINYL COMPOSITION TILE ADHESIVE	8	49915	1/4" X 1/4" X 1/4" SQ-NOTCH COMFORT GRIP TROWEL	29
2310	RESILIENT FIBERGLASS-BACKED SHEET VINYL ADHESIVE	8	72000Q	NATURAL CORK (200 SQ FT ROLL)	12
2350	HARD-SET RESILIENT FLOORING ADHESIVE	8	72003Q	NATURAL CORK (100 SQ FT ROLL)	12
3000	MULTIPURPOSE ADHESIVE	15	PC7725	WOOD, LAMINATE & VINYL PUTTY (BROWN, 3 OZ TUBE)	23
3085	MULTIPURPOSE ADHESIVE	15	PC7726	WOOD, LAMINATE & VINYL PUTTY (LIGHT, 3 OZ TUBE)	23
3087	MULTIPURPOSE CARPET ADHESIVE	16	PC7728	WOOD, LAMINATE & VINYL PUTTY (GREY, 3 OZ TUBE)	23
3095	CARPET ADHESIVE	18	PC7730	WOOD, LAMINATE & VINYL PUTTY (TAN, 3 OZ TUBE)	23
3300	MULTIPURPOSE ADHESIVE	15	PC7732	WOOD, LAMINATE & VINYL PUTTY (DARK BROWN, 3 OZ TUBE)	23
4002	LATEX CARPET PAD ADHESIVE	18	PC7733	WOOD, LAMINATE & VINYL PUTTY (LIGHT GREY, 3 OZ TUBE)	23
5900	CERAMIC TILE ADHESIVE	21			

INDEX By Description

RESILIENT ADHESIVES	6	FEATURED PRODUCTS (CONT.)		PUTTY	23
7399 UNIVERSAL+	7	10-56 LONGNECK PLUS 6" JAMB SAW	13	10-33 UNIVERSAL REPAIR KIT	23
7350 UNIVERSAL	7	10-94 13" MULTI-FLOOR CUTTER	13	PC7725 WOOD, LAMINATE & VINYL PUTTY (BROWN)	23
6280 PRESSURE SENSITIVE	7	10-950 75LBS HEAVY-DUTY FLOORING ROLLER	13	PC7726 WOOD, LAMINATE & VINYL PUTTY (LIGHT)	23
2057 VCT-EZ	8	10-955 100LBS HEAVY-DUTY FLOORING ROLLER	13	PC7728 WOOD, LAMINATE & VINYL PUTTY (GREY)	23
2310 RESILIENT	8	MULTIPURPOSE ADHESIVES	14	PC7730 WOOD, LAMINATE & VINYL PUTTY (TAN)	23
2350 HARD-SET RESILIENT	8	3300 MULTIPURPOSE	15	PC7732 WOOD, LAMINATE & VINYL PUTTY (DK BROWN)	23
2001 FELT-BACKED SHEET VINYL	9	3085 MULTIPURPOSE	15	PC7733 WOOD, LAMINATE & VINYL PUTTY (LT GREY)	23
7500 VINYL SEAM SEALER	9	3000 MULTIPURPOSE	15	MERCHANDISING	24
7200 BASE BOND®	9	3087 MULTIPURPOSE	16	PUTTY COUNTERTOP DISPLAY	25
WOOD ADHESIVES	10	CARPET ADHESIVES	17	PUTTY IN-AISLE DISPLAY	25
1550 MAX COMPLETE®	11	3095 CARPET	18	10 OZ ADHESIVE COUNTERTOP DISPLAY	25
1407 ENGINEERED	11	6700 INDOOR/OUTDOOR	18	10 OZ ADHESIVE IN-AISLE DISPLAY	26
1406 TONGUE & GROOVE	11	4002 LATEX CARPET PAD	18	30 OZ ADHESIVE COUNTERTOP DISPLAY	26
FEATURED PRODUCTS	12	8015 UNIVERSAL CARPET SEAM	19	30 OZ ADHESIVE IN-AISLE DISPLAY	26
70-197 SOUND BARRICADE UNDERLAYMENT	12	8502 LATEX CARPET SEAM	19	TROWELS	27
72000Q NATURAL CORK	12	SPECIALTY ADHESIVES	20	10033 COVE BASE ADHESIVE SPREADER	28
72003Q NATURAL CORK	12	5900 CERAMIC TILE	21	COMFORT GRIP	29
720008Q NATURAL CORK	12	7250 CORK UNDERLAYMENT	21	WOOD HANDLE	29
70-175 NATURAL CORK	12	8600 NOSE BOND®	21	ECONOMY	29
10-254V POWER-LOK® CARPET STRETCHER	13	8200 QUICK BOND SPRAY	22	SNOZZLE ADHESIVE APPLICATOR	29

AFFILIATES



ROBERTS® WARRANTY

All ROBERTS® include a manufacturer's limited warranty ensuring the product is free from defects in materials and workmanship for a period of one-year from the date of purchase. This warranty does not cover accidental damages, unreasonable or improper use, normal wear and tear, loss of use, or consequential damages. Some items, such as carpet stretchers, kickers, cutters, cargo dollies and dual air glider carry a ROBERTS® 1-Year Limited Warranty. Product registration, included with the product packaging, must be completed within 30 days of purchase for eligibility. This warranty covers refund or replacement due to a defect in materials or workmanship for a term of one year. Visit robertsconsolidated.com/warranty to register your product.

ABOUT CALIFORNIA PROPOSITION 65

Proposition 65 is a California regulatory law that requires businesses to notify California consumers about specific chemicals in the products they purchase so they can make informed decisions about protecting themselves from exposure to these chemicals. This law requires companies to properly label products that contain chemical(s) above certain threshold levels.

As part of Q.E.P. Co. Inc.'s continued best business practice and compliance program, we comply with Proposition 65 warning requirements and provide product-associated warnings. We are dedicated to meeting consumer product safety requirements applicable to our products and strive to provide high quality and safe products.

For more information on California Proposition 65, go to www.P65Warnings.ca.gov.

- *Prop 65 - 1. **⚠️WARNING:** This product can expose you to chemicals including DEHP, which is known to the State of California to cause cancer, birth defects and other reproductive harm.
- *Prop 65 - 2. **⚠️WARNING:** This product can expose you to chemicals including Lead, which is known to the State of California to cause cancer, birth defects and other reproductive harm.
- *Prop 65 - 3. **⚠️WARNING:** This product can expose you to chemicals including Nickel (Metallic), which is known to the State of California to cause cancer.
- *Prop 65 - 4. **⚠️WARNING:** This product can expose you to chemicals including Lead and DEHP which is known to the State of California to cause cancer, birth defects or other reproductive harm.
- *Prop 65 - 5. **⚠️WARNING:** This product can expose you to chemicals including Quartz and Styrene, which are known to the State of California to cause cancer and Methanol, which is known to the State of California to cause birth defects or other reproductive harm.
- *Prop 65 - 6. **⚠️WARNING:** This product can expose you to chemicals including Silicia (crystalline, respirable) and Diisodecyl Phthalates which are known to the state of California to cause cancer, and birth defects or other reproductive harm.

ROBERTS®, the e® logo, and GoldGuard® are registered trademarks of Roberts Consolidated Industries, Inc.

CRI™ and CRI Green Label +Plus® is a registered trademark of The Carpet and Rug Institute.

LEED® and its related logo, is a trademark owned by the U.S. Green Building Council® and is used with permission.

BASE BOND® is a registered trademark of Q.E.P. Co., Inc.

MAXCOMPLETE® is a registered trademark of Q.E.P. Co., Inc.

NOSE BOND® is a registered trademark of Q.E.P. Co., Inc.

The products, specifications, and Prop 65 Warnings listed in this catalog are current as of the printed date of this catalog and are subject to change. Access product data sheets, technical bulletins, warranties and SDS documents 24/7 at www.robertsconsolidated.com.

2023 FLOORING & SPECIALTY ADHESIVES

Products on cover:

UNIVERSAL+ Resilient Flooring & Modular Carpet
Tile Adhesive (7399-4), 1/16" x 1/32" x 1/32"
U-Notch Trowel (49771), Deluxe Grip Tools Pouch
(10-260), 30' Tape Measure (10-140)



Featured on the cover:

**KEVIN
KEEFE**

QEP® / ROBERTS® National Technical
Sales Manager, 2022 St. Louis Regional
Installer of the Year, and 2023 National
Installer of the Year Finalist.

Scan here
for the latest



ROBERTS®
TOOL CATALOG

Scan here
for the latest



ROBERTS®
ADHESIVE CATALOG



1001 Broken Sound Parkway, NW
Boca Raton, Florida 33487

For more information call 866-435-8665
Se habla español



www.robertsconsolidated.com

H1523-11871
ROBADHESIVE2023